

A.R.I. S-015, S-016, S-100

Aquestia
Directing the Flow



Waterworks

High Pressure, Automatic Air Release Valve


Description

A.R.I. S-015, S-016, S-100 are high pressure Automatic Air Release Valves. Installed on pressurized liquid transmission systems, the Air Valves are designed to release accumulated air, optimizing pipeline hydraulic efficiency by reducing head losses and improving flow.

Installation

- On high-pressure pumps
- On high-pressure transmission pipelines

Operation



Automatic Air Release



One-way Out

Features and Benefits

Air release valve orifice	Covers a wide pressure range (up to 100 bar)
Aerodynamic design	High capacity air discharge, while system is under pressure
	Saves energy and increases system efficiency
Air release valve rolling seal	Leak-free sealing over a wide range of pressure differentials
	Lessens obstruction by debris due to its unique design
Installation and maintenance	Simple product design easy to install and to maintain
	Reduces down time
	No need to disconnect the valve from the main line for maintenance procedures
Construction materials	Non-corrosive and durable
 ATEX certified air valves	Certification is conditional on the customer connecting the designated part on the product to a dedicated ground connection point
 NSF/ANSI 61 Certified & Listed	Certification for drinking water system component


Technical Specifications

Size range	½" ¾" 1"
Sealing pressure range	A.R.I. S-015 0.2-40 bar (PN40) A.R.I. S-016 0.2-64 bar (PN64) A.R.I. S-100 0.2-100 bar (PN100)
Testing pressure	1.5 times maximum working pressure
Temperature	Maximum working temperature: 60° C. Maximum intermittent temperature: 90° C.
Valve coating	Fusion bonded epoxy coating in compliance with standard DIN 30677-2

Upon ordering, please specify: model, size, working pressure, thread/flange standard and type of liquid

The valve installed under the air valve must be fully open to prevent damage or malfunction and ensure performance within the specifications of the air valve.

For complete installation instructions, please refer to the IOM document.



Valve Selection Options

Models	A.R.I. S-015 A.R.I. S-016 A.R.I. S-100
Valve connection	Threaded male BSPT/NPT
Standard materials	Cast Ductile Iron (S-015 Only), Cast Steel, Cast Stainless Steel
Optional add-on components	One-way Out attachment, allows for air discharge only, prevents air intake
Pressure rating	PN40 A.R.I. S-015 PN64 A.R.I. S-016 PN100 A.R.I. S-100




A.R.I. S-015

A.R.I. S-016
A.R.I. S-100

Dimensions and Weight

Model	Dimensions (mm)		Connections	Weight (kg)	Orifice Area (mm ²)
	max. A	B			
A.R.I. S-015	158	292	1/2" BSP Female	5.4	15
A.R.I. S-016	197	290	1/2" BSP Female	11	15
A.R.I. S-100	197	290	1/2" BSP Female	12	6




NOTE

Dimension A in the picture and in the table shows the maximum product width.


All product weights are approximate, due to the differences in flange standards, materials and variable accessories.

Flow Charts


A.R.I. S-015 Automatic Air Release Flow Rate

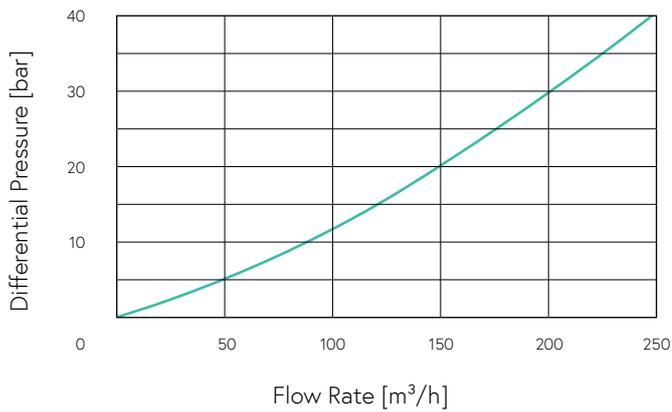

A.R.I. S-016 Automatic Air Release Flow Rate

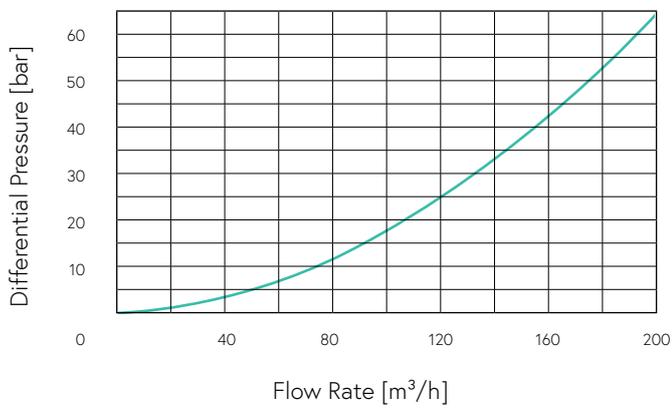

A.R.I. S-100 Automatic Air Release Flow Rate

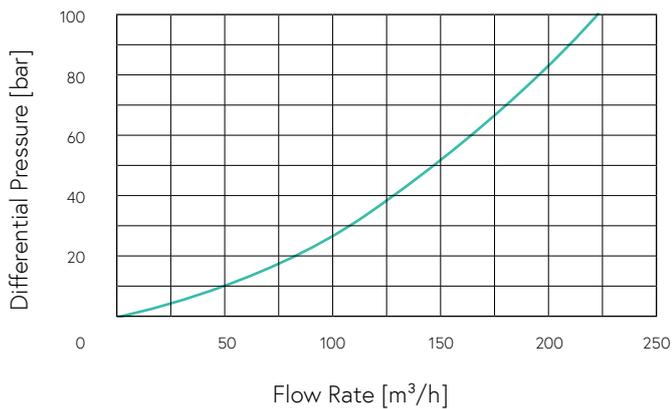

Parts List and Specifications

No.	Part	Material
1	Cover Assembly	
1a	Discharge Outlet	PVC
1b	Circlip	Stainless Steel 304
1c	Cover	Ductile Iron
2	Float & Orifice Assy.	
2a	O-ring	NBR / EPDM
2b	Orifice Seat	Reinforced Nylon
2c	Rolling Seal	EPDM
2d	Lever	Reinforced Nylon
2e	Roll Pin	Stainless Steel 304
2f	Float	Polypropylene / Stainless Steel 316
3	Body Assembly	
3a	O-ring	NBR / EPDM
3b	Bolts, Nuts & Washers	Steel / Stainless Steel 316
3c	Body	Ductile Iron
3d	Adaptor	Brass / Stainless Steel 316



Parts List and Specifications

No.	Part	Material
1	Cover Assembly	
1a	Orifice Cover	Polypropylene
1b	Nut	Brass
1c	Cover	Cast Steel
2	Float & Orifice Assy.	
2a	Stopper Pin	Stainless Steel 304
2b	O-ring	NBR / EPDM
2c	Orifice Seat	Reinforced Nylon
2d	Rolling Seal	EPDM
2e	Lever	Reinforced Nylon
2f	Roll Pin	Stainless Steel 304
2g	Float	Polycarbonate / Stainless Steel 316
3	Body Assembly	
3a	O-ring	NBR / EPDM
3b	Bolts, Nuts & Washers	Steel / Stainless Steel 316
3c	Body	Cast Steel
3d	Adaptor	Brass / Stainless Steel 316

